




## MULTIMODE FIBER CONNECTORS

Datacom Fiber optic connectors terminates the end of the optical fiber and enables quicker connection and disconnection. The connectors mechanically couple and align the cores of fibers so light can pass.

### LC MULTIMODE CONNECTOR

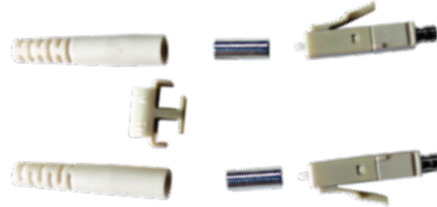

## COMPLIANCE

ANSI/TIA 568-C.3

## PHYSICAL CHARACTERISTICS

Cap	PE, Transparent Color
Housing	PBT+15%,UL 94V-0, Ivory Color
New SC One Piece Type	Multimode
Bush	Aluminium
Boot	TPE,beige color (3.0mm)

## PERFORMANCE CHARACTERISTICS

Durability	500 Cycles
Vibration	10to 55 Hz 1, 5mm Double Amplitude
Tensile Strength	10 kgf
Operating Temperature:	(-)20° to +70°
Temperature Cycle	(-)20° to +80°

## ORDERING INFORMATION

Description	Order Code
SC Simplex Connector Multimode	DC-CNLC-MM-S
LC Simplex Connector Multimode	DC-CNLC-MM-S
LC Duplex Connector Multimode	DC-CNLC-MM-D